

Cambridge International AS & A Level

CANDIDATE NAME					
CENTRE NUMBER			CANDIDATE NUMBER		



COMPUTER SCIENCE

9618/21

Paper 2 Fundamental Problem-solving and Programming Skills

May/June 2022

2 hours

You must answer on the question paper.

You will need: Insert (enclosed)

INSTRUCTIONS

- Answer all questions.
- Use a black or dark blue pen.
- Write your name, centre number and candidate number in the boxes at the top of the page.
- Write your answer to each question in the space provided.
- Do not use an erasable pen or correction fluid.
- Do not write on any bar codes.
- You may use an HB pencil for any diagrams, graphs or rough working.
- Calculators must not be used in this paper.

INFORMATION

- The total mark for this paper is 75.
- The number of marks for each question or part question is shown in brackets [].
- No marks will be awarded for using brand names of software packages or hardware.
- The insert contains all the resources referred to in the questions.


Refer to the **insert** for the list of pseudocode functions and operators.

1	(a)	-	rogrammer draws blem.	a program flowchart to show the sequence of ste	eps required to so	lve a
		Giv	e the technical ter	m for a sequence of steps that describe how to so	olve a problem.	
	(b)	The	e table lists some c	of the variables used in a program.		
		(i)	Complete the tab	le by writing the most appropriate data type for e	ach variable.	
			Variable	Use of variable	Data type	
			Temp	Stores the average temperature		
			PetName	Stores the name of my pet		
			MyDOB	To calculate the number of days until my next birthday		
			LightOn	Stores state of light; light is only on or off		
						[4]
		(ii)	One of the name good practice.	es used for a variable in the table in part 1(b)(i)	is not an examp	le of
			Identify the varial	ole and give a reason why it is not good practice	to use that name.	
			Variable			
			Reason			
						[2]
	(c)	Cor	mplete the table by	v evaluating each expression.		[-]

Expression	Evaluation
INT((31 / 3) + 1)	
MID(TO_UPPER("Version"), 4, 2)	
TRUE AND (NOT FALSE)	
NUM_TO_STR(27 MOD 3)	

[4]

2 Examine the following state-transition diagram.

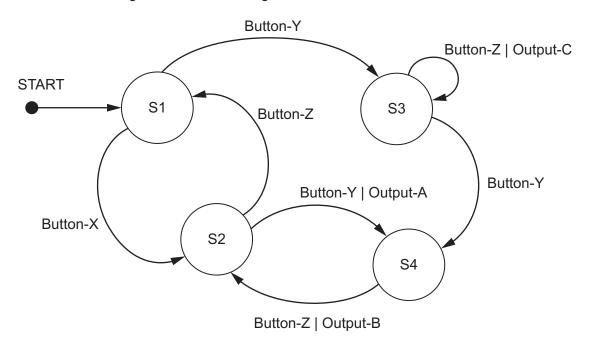

(a) Complete the table with reference to the diagram.

	Aliswei
The number of different inputs	
The number of different outputs	
The single input value that could result in S4	

[3]

(b) The initial state is S1.

Complete the table to show the inputs, outputs and next states.

Input	Output	Next state
Button-Y		
	none	
Button-Z		S2
	none	

[4]

	e manager of a cinema wants a program to allow users to book seats. The cinema has several eens. Each screen shows a different film.
(a)	Decomposition will be used to break the problem down into sub-problems.
	Describe three program modules that could be used in the design.
	Module 1
	Module 2
	Module 3
	[3]
(b)	Two types of program modules may be used in the design of the program.
	Identify the type of program module that should be used to return a value.
	[1]

4 A stack is created using a high-level language. Memory locations 200 to 207 are to be used to store the stack.

The following diagram represents the current state of the stack.

 ${\tt TopOfStack} \ \textbf{points to the last value added to the stack}.$

Stack		Pointer		
Memory location	Value			
200				
201				
202				
203	'F'	← TopOfStack		
204	'C'			
205	'D'			
206	'E'			
207	'H'			

(a) Complete the following table by writing the answers.

	Answer
The value that has been on the stack for the longest time.	
The memory location pointed to by TopOfStack if three POP operations are performed.	

[2]

(b) The following diagram shows the current state of the stack:

Stacl	<	Pointer
Memory location	Value	
200		
201		
202	'W'	← TopOfStack
203	'Y'	
204	'X'	
205	'Z'	
206	'N'	
207	'P'	

The following operations are performed:

POP

POP

PUSH 'A'

PUSH 'B'

POP

PUSH 'C'

PUSH 'D'

Complete the diagram to show the state of the stack **after** the operations have been performed.

Stack Pointer

Memory location	Value
200	
201	
202	
203	
204	
205	
206	
207	

5	Fach line	of a text file	contains data	organised into	fixed-length	fields as	shown:
•		or a toxt me	, contains data	organioca into	IIXOU IOLIGUI	noido do	OIIC VVIII.

<Field 1><Field 2><Field 3>

Describe the algorithm needed.

An algorithm is required to search for the first instance of a given value of Field 2 and, if found, to output the corresponding values for Field 1 and Field 3.

Do not include pseudocode statements in your answer.
[6]

6	(a)	Δn	а	laorithm	will.

- output **each** integer value between 100 and 200 that ends with the digit 7, for example, 107
- output a final count of the number of values that are output.

Write pseudocode for this algorithm.
Any variables used must be declared.

(b) Study the following pseudocode.

CASE OF MySwitch 1: ThisChar ← 'a' 2: ThisChar ← 'y' 3: ThisChar ← '7' OTHERWISE: ThisChar ← '*'
ENDCASE
Write pseudocode with the same functionality without using a CASE structure.
[4]


7	A st	ring is a palindrome if it reads the same forwards as backwards.
	The	following strings are examples of palindromes: "Racecar" "madam" "12344321"
	Upp to 'a	per-case and lower-case characters need to be treated the same. For example, 'A' is equivalent a'.
	(a)	A function IsPalindrome () will take a string parameter. The function will return TRUE if the string is a palindrome and will return FALSE if the string is not a palindrome.
		Write pseudocode for IsPalindrome().

 •	 	
 •	 	
		17

(b) Strings may consist of several words separated by spaces.

For example, the string "never odd or even" becomes a palindrome if the spaces are removed.

The program flowchart represents an algorithm to produce a string OutString by removing all spaces from a string InString.

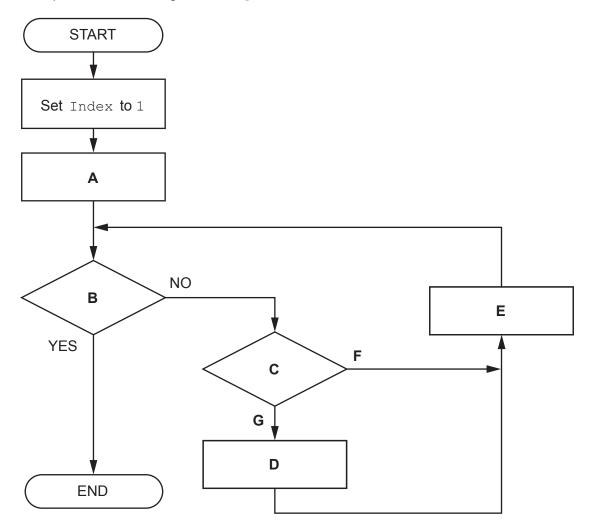

Complete the table by writing the text that should replace each of the labels B, C, D, F and G.

Note: the text may be written as a pseudocode statement.

Label	Text
Α	Set OutString to ""
В	
С	
D	
E	Set Index to Index + 1
F	
G	

8 A program allows a user to save passwords used to login to websites. A stored password is inserted automatically when the user logs into the corresponding website.

A student is developing a program to generate a password. The password will be of a fixed format, consisting of **three groups of four** alphanumeric characters. The groups are separated by the hyphen character '-'.

An example of a password is: "FxAf-3haV-Tq49"

A global 2D array Secret of type STRING stores the passwords together with the website domain name where they are used. Secret contains 1000 elements organised as 500 rows by 2 columns.

Unused elements contain the empty string (""). These may occur anywhere in the array.

An example of a part of the array is:

Array element	Value
Secret[27, 1]	"www.thiswebsite.com"
Secret[27, 2]	"•••••
Secret[28, 1]	"www.thatwebsite.com"
Secret[28, 2]	"•••••

Note:

- For security, passwords are stored in an encrypted form, shown as "•••••••" in the example.
- The passwords cannot be used without being decrypted.
- Assume that the encrypted form of a password will not be an empty string.

The programmer has started to define program modules as follows:

Module	Description
RandomChar()	 Generates a single random character from within one of the following ranges: 'a' to 'z' 'A' to 'Z' '0' to '9' Returns the character
Encrypt()	 Takes a password as a parameter of type string Returns the encrypted form of the password as a string
Decrypt()	 Takes an encrypted password as a parameter of type string Returns the decrypted form of the password as a string

For reference, relevant ASCII values are as follows:

Character range	ASCII range
'a' to 'z'	97 to 122
'A' to 'Z'	65 to 90
'0' to '9'	48 to 57

(a)	Write pseudocode for module RandomChar().
	You may wish to refer to the $insert$ for a description of the CHR () function. Other functions may also be required.
	[6]
	[6]

(b) A new module is defined as follows:

Module	Description
FindPassword()	 Takes a website domain name as a parameter of type string Searches for the website domain name in the array Secret If the website domain name is found, the decrypted password is returned If the website domain name is not found, a warning message is output, and an empty string is returned

Write pseudocode for module FindPassword().
Assume that modules Encrypt() and Decrypt() have already been written.

(c)	The modules ${\tt Encrypt()}$ and ${\tt Decrypt()}$ are called from several places in the main program.
	Identify a method that could have been used to test the main program before these modules were completed. Describe how this would work.
	Method
	Description
	[3]
(d)	A validation function is written to check that the passwords generated are valid.
	To be valid, each password must:
	 be 14 characters long be organised as three groups of four case-sensitive alphanumeric characters. The groups are separated by hyphen characters not include any duplicated characters, except for the hyphen characters.
	Note: lower-case and upper-case characters are not the same. For example, 'a' is not the same as 'A'.
	Give two password strings that could be used to test different areas of the validation rules.
	Password 1
	Password 2[2]
(e)	The ${\tt RandomChar}$ () module is to be modified so that alphabetic characters are generated twice as often as numeric characters.
	Describe how this might be achieved.
	[3]

Permission to reproduce items where third-party owned material protected by copyright is included has been sought and cleared where possible. Every reasonable effort has been made by the publisher (UCLES) to trace copyright holders, but if any items requiring clearance have unwittingly been included, the publisher will be pleased to make amends at the earliest possible opportunity.

To avoid the issue of disclosure of answer-related information to candidates, all copyright acknowledgements are reproduced online in the Cambridge Assessment International Education Copyright Acknowledgements Booklet. This is produced for each series of examinations and is freely available to download at www.cambridgeinternational.org after the live examination series.

Cambridge Assessment International Education is part of Cambridge Assessment. Cambridge Assessment is the brand name of the University of Cambridge Local Examinations Syndicate (UCLES), which is a department of the University of Cambridge.