


Cambridge International AS & A Level

CANDIDATE NAME					
CENTRE NUMBER			CANDIDATE NUMBER		



COMPUTER SCIENCE

9618/23

Paper 2 Fundamental Problem-solving and Programming Skills

May/June 2023

2 hours

You must answer on the question paper.

You will need: Insert (enclosed)

INSTRUCTIONS

- Answer all questions.
- Use a black or dark blue pen.
- Write your name, centre number and candidate number in the boxes at the top of the page.
- Write your answer to each question in the space provided.
- Do **not** use an erasable pen or correction fluid.
- Do not write on any bar codes.
- You may use an HB pencil for any diagrams, graphs or rough working.
- Calculators must not be used in this paper.

INFORMATION

- The total mark for this paper is 75.
- The number of marks for each question or part question is shown in brackets [].
- No marks will be awarded for using brand names of software packages or hardware.
- The insert contains all the resources referred to in the questions.

Refer to the **insert** for the list of pseudocode functions and operators.

1 The following pseudocode represents part of the algorithm for a program.

Line numbers are for reference only.

(a) The pseudocode contains references to an array.

Complete the table by writing the answer for each row.

Answer

The dimension of the array	
The name of the variable used as an array index	
The number of elements in the array	

[3]

(b) The pseudocode contains two errors. One error is that variable PCount has not been declared.

Identify the other error and state the line number where it occurs.

Error	
Line number	[2]

(c) The pseudocode does not include a declaration for PCount.

State the data type that should be used in the declaration.

.....[1]

(d) The pseudocode statements given in the following table are used in other parts of the algorithm.

Complete the table by placing **one or more** ticks (\checkmark) in each row.

The first row has already been completed.

Pseudocode statement	Input	Process	Output
INPUT MyChoice	√		
OUTPUT FirstName & LastName			
WRITEFILE YourFile, TextLine			
READFILE MyFile, TextLine			
Result ← SQRT(NextNum)			

[4]

A pr	ogra	m stores a date of birth for a student using a variable, MyDOB, of type DATE.
(a)	MyD	OB has been assigned a valid value corresponding to Kevin's date of birth.
	Con	nplete the pseudocode statement to test whether Kevin was born on a Thursday.
	IF	THEN [2]
(b)		nction CheckDate() will take three integer parameters representing a day, month and r of a given date.
		function will validate the date of birth for a student that the parameters passed to it
		resent. a date to be valid, a student must be at least 18 in year 2020.
	(i)	Two of the parameter values can be checked without reference to the third parameter.
		Describe these two checks.
		Check 1
		Check 2
		[2]
	(ii)	Several values of the parameter representing the day can only be checked completely by referring to the value of one other parameter.
		Describe this check.
		[2]

BLANK PAGE

- 3 A program processes data using a stack. The data is copied to a text file before the program ends.
 - (a) The following diagram shows the current state of the stack.

The operation of this stack may be summarised as follows:

- The TopOfStack pointer points to the last item added to the stack.
- The BottomOfStack pointer points to the first item on the stack.
- The stack grows upwards when items are added.

Stack	Pointer	
Memory location	Value	
506		
505	www	← TopOfStack
504	YYY	
503	XXX	
502	ZZZ	
501	NNN	
500	PPP	← BottomOfStack

(i) An error will be generated if an attempt is made to POP a value when the stack is empty.

State the maximum number of consecutive POP operations that could be performed on the stack shown above **before** an error is generated.

.....[1]

- (ii) The following operations are performed:
 - 1. POP and store value in variable Data1
 - 2. POP and store value in variable Data2
 - 3. PUSH value AAA
 - 4. PUSH value BBB
 - 5. POP and discard value
 - 6. POP and store value in variable Data2

Complete the diagram to show the state of the stack and the variables **after** the given operations have been performed.

Stack

Pointer

Memory location	Value
506	
505	
504	
503	
502	
501	
500	

Variable	Value
Data1	
Data2	

[4]

(b)	The	data is copied to a text file before the program ends.
	(i)	State an advantage of writing the data from the stack to a text file before the program ends.
		[1]
	(ii)	A module SaveStack() will write the data from the stack to a text file.
		Express an algorithm for ${\tt SaveStack}(\tt)$ as five steps that could be used to produce pseudocode.
		Write the five steps.
		Step 1
		Step 2
		Step 3
		Step 4
		Step 5

- **4** A function MakeString() will:
 - 1. take two parameters:
 - a count as an integer
 - a character
 - 2. generate a string of length equal to the count, made up of the character
 - 3. return the string generated, or return "ERROR" if the count is less than 1.

For example, the function call:

MakeString(3, 'Z') will return the string "ZZZ"

Write pseudocode for function MakeString().	

5

A pr	rogram is designed, coded and compiled without errors. The compiled code is sent for test	ting.
(a)	The program will be tested using the walkthrough method.	
	Additional information will be needed before this method can be used.	
	Identify this additional information and explain why it is needed.	
	Additional information	
	Explanation	
		[3]
		ျပ
(b)	Testing is completed and the program is made available to users.	
	Some time later, changes are made to the program to improve the speed of response.	
	State the type of maintenance that has been applied to the program.	
		. [1]

6 A procedure Select()) Will:
-------------------------------	---------

- 1. take two integer values as parameters representing start and end values where both values are greater than 9 and the end value is greater than the start value
- 2. output **each** integer value between the start and the end value (**not** including the start and end values), where the sum of the last two digits is 6, for example, 142.

(a)	Write pseudocode for procedure Select().
	Parameter validation is not required.
	[7]

(b) The check performed by procedure Select() on the last two digits is needed at several places in the program and will be implemented using a new function.

The new function CheckNum() will:

- allow the required sum to be specified (not just 6)
- check one number
- return an appropriate value.

Describe the function interface and two advantages of this modular approach.
Interface
Advantage 1
Advantage 2

A school has a library system which allows students to borrow books for a length of time. Information relating to students and books is stored in text files. Student information includes name, home address, email address, date of birth, tutor and subject choices. Book information includes author, title, subject category, library location and the date that the book was borrowed.

A program helps the staff to manage the borrowing of books.

(a) A new module needs to be written to generate emails to send to students who have an overdue book. Students who are sent an email are prevented from borrowing any more books until the overdue book is returned.

The process of abstraction has been used when designing the new module.


(i)	State the purpose of applying abstraction to this problem.
	[1]
	[1]
(ii)	Identify one item of information that is required and one item that is not required in the new module. Justify your choices.
	Item required
	Justification
	Item not required
	Justification
	[2]
(iii)	Identify two operations that would be required to process data when an overdue book is returned.
	Operation 1
	Operation 2
	[2]

(b) Part of the library program contains program modules with headers as follows:

Pseudocode module header
PROCEDURE Module-X()
PROCEDURE Module-Y(BYREF RA : INTEGER, SA : REAL)
PROCEDURE Overlay()
FUNCTION Replace (RA: INTEGER, RB: BOOLEAN) RETURNS BOOLEAN
FUNCTION Reset(TA: STRING) RETURNS INTEGER

Module-X() and Module-Y() are both called from module Overlay().

Complete the structure chart.

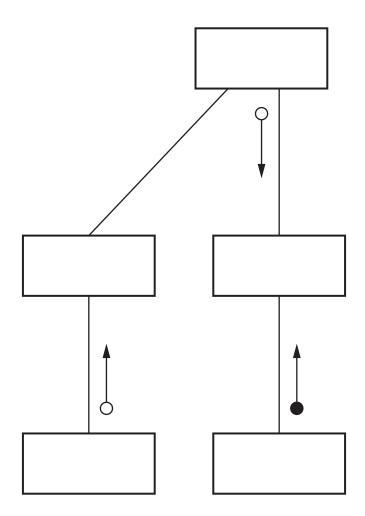

8 A computer shop assembles desktop computers, using items bought from several suppliers. A text file Stock.txt contains information about each item.

Information for each item is stored as a single line in the Stock.txt file in the format:

<ItemNum><SupplierCode><Description>

Item information is as follows:

	Format	Comment
ItemNum	4 numeric characters	unique number for each item in the range "0001" to "5999" inclusive
SupplierCode	3 alphabetic characters	code to identify the supplier of the item
Description	a string	a minimum of 12 characters

The file is organised in ascending order of ItemNum and does not contain all possible values in the range.

The programmer has defined the first program module as follows:

Module	Description
ChangeSupp()	 called with two parameters Code1 and Code2 of type string that represent valid supplier codes creates a new file NewStock.txt from the contents of the file Stock.txt where any reference to Code1 is replaced by Code2 returns a count of the number of items that have had their supplier code changed

,				

(b) A new module is required:

Module	 takes a parameter of type string that represents a SupplierCode searches the Stock.txt file for each line of item information that contains the given SupplierCode produces a formatted report of items for the given SupplierCode, for example, for supplier DRG, the output could be: 				
Report_1()					
	Report for Supplier: DRG				
	Item Description				
	1234 USB Printer Cable 3m 1273 32GB USB Flash Drive 1350 Mouse Mat 320 x 240mm				
	Number of items listed: 3				

Write pseudocode for module Report_1 ().

(c) The format of the output from module Report_1 () from part (b) is changed. The number of items listed is moved to the top of the report as shown in the example:

	Report for Supplier: DRG Number of items listed: 3				
	Item	Description			
	1234 1273 1350	USB Printer Cable 3m 32GB USB Flash Drive Mouse Mat 320 x 240mm			
(i)	Explain why t	this new layout would increase the complexity of the algorithm.			
			[2]		
(ii)		m will be modified to produce the report in the new format. The nll be implemented so that the file Stock.txt is only read once.	nodified		
	Describe the	e modified algorithm.			

BLANK PAGE

BLANK PAGE

Permission to reproduce items where third-party owned material protected by copyright is included has been sought and cleared where possible. Every reasonable effort has been made by the publisher (UCLES) to trace copyright holders, but if any items requiring clearance have unwittingly been included, the publisher will be pleased to make amends at the earliest possible opportunity.

To avoid the issue of disclosure of answer-related information to candidates, all copyright acknowledgements are reproduced online in the Cambridge Assessment International Education Copyright Acknowledgements Booklet. This is produced for each series of examinations and is freely available to download at www.cambridgeinternational.org after the live examination series.

Cambridge Assessment International Education is part of Cambridge Assessment. Cambridge Assessment is the brand name of the University of Cambridge Local Examinations Syndicate (UCLES), which is a department of the University of Cambridge.